

Models:

RGTA-2424-1

RGM-2424-1

Regal Series Gas Griddles

Item:	
Quantity:	
Date:	

	•	·	
0 2	0	•	•
• •	()	1	OLIS, Range

RGTA-2436-1

☐ RGM-2436-1

Model RGTA-2436-1



Model RGM-2448-1

Standard Features:

RGTA-2460-1

RGM-2460-1

RGTA-2448-1

RGM-2448-1

- Built-in front grease trough
- Large capacity removable grease can
- Aluminized steel, 24,000 BTU/hr burners, (one every 12" of griddle width)
- 3/4" gas regulator
- 1" thick cold rolled steel plate
- 4" (102mm), stainless steel legs with adjustable feet
- 14 gauge splash guard
- Stainless steel front, sides, and landing ledge

 All RGTA models are thermostat-controlled; 100°F - 450°F, (RGM models are valve-controlled)

RGTA-2472-1

RGM-2472-1

Optional Features:

- Grooved griddle, (in 12" increments)
- Stainless steel equipment stand
- Casters on stand swivel type








Model #	Docarintion	Total BTU		Shipping Information				
wodei #	Description	Natural	Propane	Lbs/Kg	Cu Ft			
Thermostat Controlled Standard Griddle (1" steel plate)								
RGTA-2424-1	Griddle 22"(559mm) x 24"(610mm)	48,000	48,000	270/122	18			
RGTA-2436-1	Griddle 22"(559mm) x 36"(914mm)	72,000	72,000	370/168	22			
RGTA-2448-1	Griddle 22"(559mm) x 48"(1219mm)	96,000	96,000	441/200	33			
RGTA-2460-1	Griddle 22"(559mm) x 60"(1524mm)	120,000	120,000	578/262	40			
RGTA-2472-1	Griddle 22"(559mm) x 72"(1829mm)	144,000	144,000	800/363	47			
Manually Controlled Standard Griddle (1" steel plate)								
RGM-2424-1	Griddle 22"(559mm) x 24"(610mm)	48,000	48,000	247/112	18			
RGM-2436-1	Griddle 22"(559mm) x 36"(914mm)	72,000	72,000	359/159	22			
RGM-2448-1	Griddle 22"(559mm) x 48"(1219mm)	96,000	96,000	446/202	33			
RGM-2460-1	Griddle 22"(559mm) x 60"(1524mm)	120,000	120,000	561/254	40			
RGM-2472-1	Griddle 22"(559mm) x 72"(1829mm)	144,000	144,000	690/309	47			



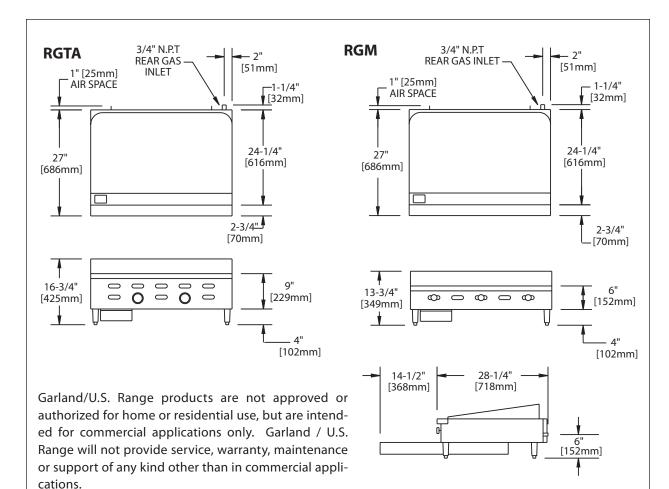

SERIES	HEIGHT	WIDTH				DEPTH	GAS INLET	
16	16 2 /4"	RGTA-2424-1	RGTA-2436-1	RGTA-2448-1	RGTA-2460-1	RGTA-2472-1	28"	2 /4// NI DT
RGTA	RGTA 16 3/4" (425mm)	24" (610mm)	36" (914mm)	48" (1219mm)	60" (1524mm)	72" (1829mm)		
RGM 13 3/4" (349mm)	RGM-2424-1	RGM-2436-1	RGM-2448-1	RGM-2460-1	RGM-2472-1	(711mm)	3/4" N PT	
	(349mm)	24" (610mm)	36" (914mm)	48" (1219mm)	60" (1524mm)	72" (1829mm)		

CLEARANCES				OPERATING PRESSURE			
INSTALLATION		ENTRY		NATURAL GAS		PROPANE	
to Non Combustible	to Combustible	Crated	Uncrated	"WC	MBar	"WC	Mbar
6" (152mm)	16" (915mm)	29" (737mm)	14" (356mm)	5	12.5	10	25

Form# RGTA/RGM (06/07)